

B 212 B Subwoofer



Description

High-power subwoofer with high sound pressure and easy-to-handle cabinet. The precisely matched double-chamber band-pass subwoofer with 2 × 12" long excursion chassis has a wide frequency range of 35 ... 140 Hz and permits unproblematic coupling to satellite loudspeakers with crossover frequencies between 80 Hz and 150 Hz.

Universal application in club and PA systems, especially in combination with our full-range loudspeakers F 8, F 10, F 12 and F 208 AIArray® as well as the line-array loudspeakers ZL 206.

Special Features


- Band-pass subwoofer
- Compact cabinet
- 2 × 12" long excursion chassis
- 2000 watts power capacity
- High sound pressure

Fields of Application

- Media rooms
- Gastronomy
- Clubs, discotheques
- Mobile systems
- Large rooms, halls

B 212 B Subwoofer

Dimensions B 212 B

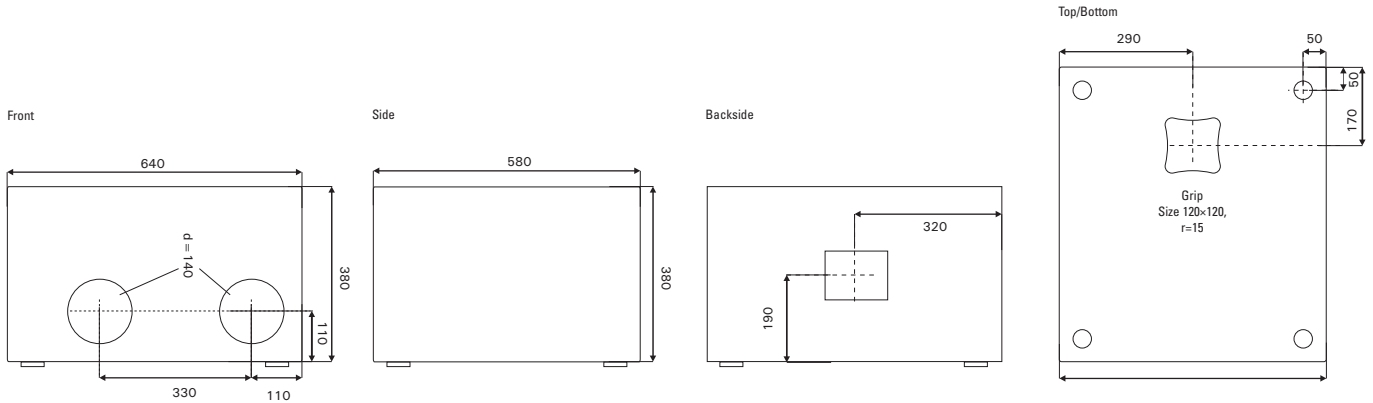

Technical Data

Principle	Band-pass subwoofer
Components	2 x 12" long excursion woofer
Frequency range	35 ... 140 Hz, 40 ... 118 Hz (+/- 3 dB)
Impedance	4 ohms
Power capacity	RMS 1000 watts, program 2000 watts
Sound pressure	94 dB (1W/1m), max. 127 dB 100 dB (1W/1m), max. 133 dB (half-space)
Dispersion angle (H x V)	360°
Dimensions (W x H x D)	380 x 640 x 580 mm (without rubber feet)
Weight	37 kg
Cabinet	Multiplex cabinet, grips top/bottom
Connections	2 x speakon NL 4 MP
Warranty	5 years

Model

Order-No.

Version

B 212 B Black	1423-0001	RAL 9005, textured paint, black
----------------------	-----------	------------------------------------

Other colours and models on request

Measuring Diagramm

Frequency response B 212 B 1W/1m (full space)

